



EuroSkyPark

Overview

Your
competent
partner for
M2M
Communication
via Satellite

In response of the increased requirements for security and stability, EuroSkyPark took the challenge to develop a new, improved satellite router. Based on our experience, but also considering new features and possibilities, the new SatConnect models integrate all necessary components for a stable, yet highly configurable system.

As its predecessor, the SatConnect is used for establishing bidirectional satellite links for SCADA communication. Locations like wind or solar power plants, substations, gas pipelines or any other technical facilities can be monitored and controlled remotely. The system consists of two parts, the Indoor and the Outdoor unit. The outdoor unit consists of the satellite dish (default diameter 70 cm, or 120 cm) and the attached bidirectional LNB (2W or 3W), connected to the SatConnect via coaxial cables.


The SatConnect R1 supports IEC 60870-5-104 connections (TCP/IP) and optionally IEC 60870-5-101 (serial RS232) connections, widely used in SCADA environments. The router has been designed for high flexibility and offers a large variety of configuration options. Virtual Private Networking according to state-of-the-art technology and standards is possible.

The enhanced monitoring and diagnostic capabilities facilitate an efficient troubleshooting within the highly complex network structures of our customers. A new watchdog component, specially redesigned for all our SatConnect models facilitates event-based automatic rebooting of the SatConnect and/or external devices. An active overheating protection (temperature controlled fan) ensures faultless operation even in harsh environments.

Monitoring
Operating
Controlling

Application

The typical application is the integration of remote sites into the corporate network.

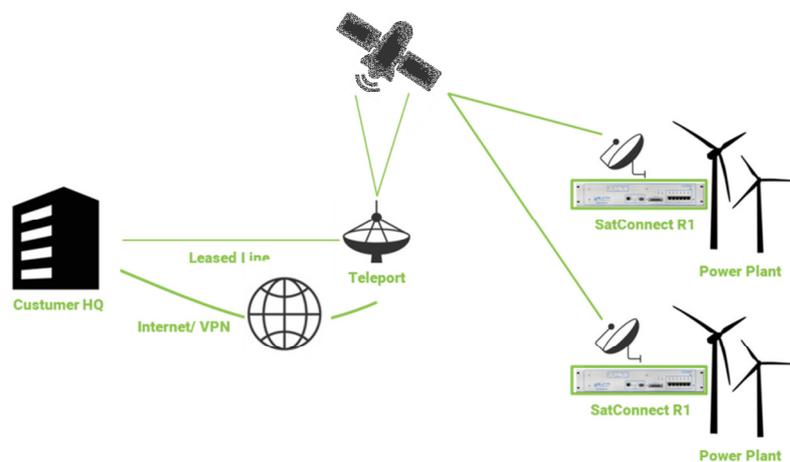

New model

Improved components
High Security Standard
Maximum Stability


Front View:



Model:

- R1N with 25 pole SUB-D serial connector
- 6 Modem LEDs
- SAT-ETH port
- Configuration Switch
- Reset button
- Potential free watchdog alarm output (1-3: NC and 1-4 NO)

Rear View:

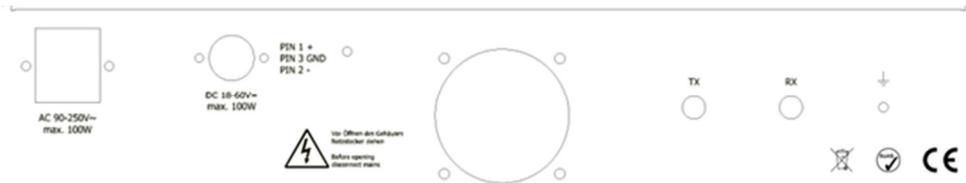

Technical Data

Power supply:

- Redundant AC/DC
- 230V AC 50/60 Hz
- 18-60 V DC, Power min. 100W

Dimensions and Environmental:

- 19 " rack mount (2 HU) 482 x 240 x 90
- Weight 4,7 kg
- Operating Range 0° C...50° C, storage temperature -20°... 65° C
- Humidity range <80 %, non-condensing

Ethernet Interfaces:

- 6 RJ-45 ethernet ports, LAN4-LAN9
- any port configurable as additional WAN port for backup connection, default: LAN9

The configuration shall be done only by ESP or by qualified personnel with authorization from ESP, on site or remotely.

Note: In normal operation mode (default, LAN ports active), the Config Switch is "Off". There are no other user serviceable parts.